




1 GET ORGANIZED

Here is what you are looking at:

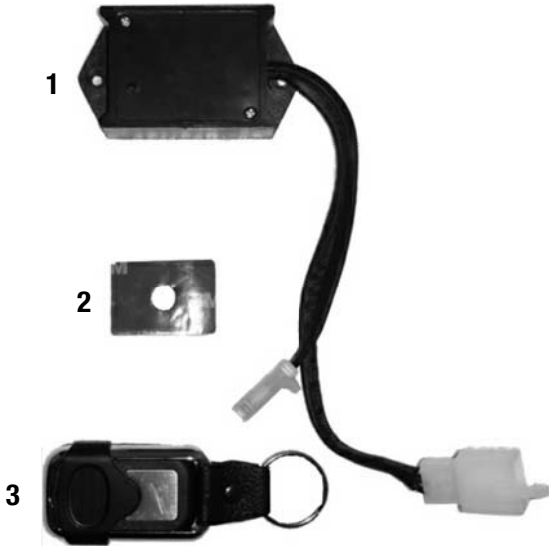


You will need:

- Rag
- Methylated Spirits / Denatured Alcohol

Item #	Quantity	Description
1	1	CONTROL BOX
2	1	DOUBLE SIDED TAPE
3	1	REMOTE CONTROL

2 INSTALL REMOTE CONTROL UNIT

(A) With the LED wiring harness disconnected from the vehicle's battery system, locate and disconnect the white electrical connector plug by pushing down on the locking clip and pulling the plug apart as shown.

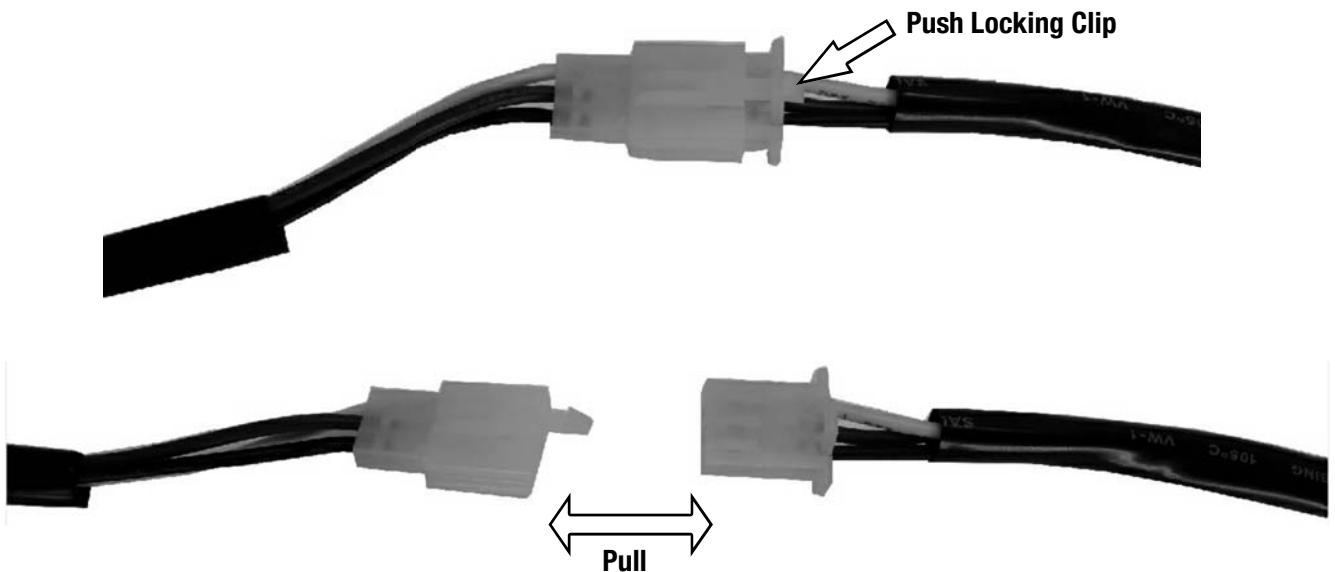

2 INSTALL REMOTE CONTROL UNIT CONT...

- (B) Connect the black control box between the two connector plugs from Step 1. Find a suitable location to mount the control box using the double sided tape provided. Clean the back of the control box and area where the box is to be mounted using a clean rag and some methylated spirits / denatured alcohol before sticking.



- (C) Reconnect the LED wiring harness to the vehicle's battery system. With the harness's switch in the ON position, the LED light may now be controlled via the remote control.

