






**INSTALL TIME: 2 mins**

# 1 FITTING THE T-SLOT RUBBER ONTO YOUR RACK

**(A)** Decide where on the rack you would like to insert the T-slot Rubber. The Rubber can be inserted into any of the Open Channels as shown, be it the Side Profiles or the Slats.

To insert the T-slot Rubber, pinch/squeeze the sides of Rubber together, then push/roll the Rubber into the Open Channel.

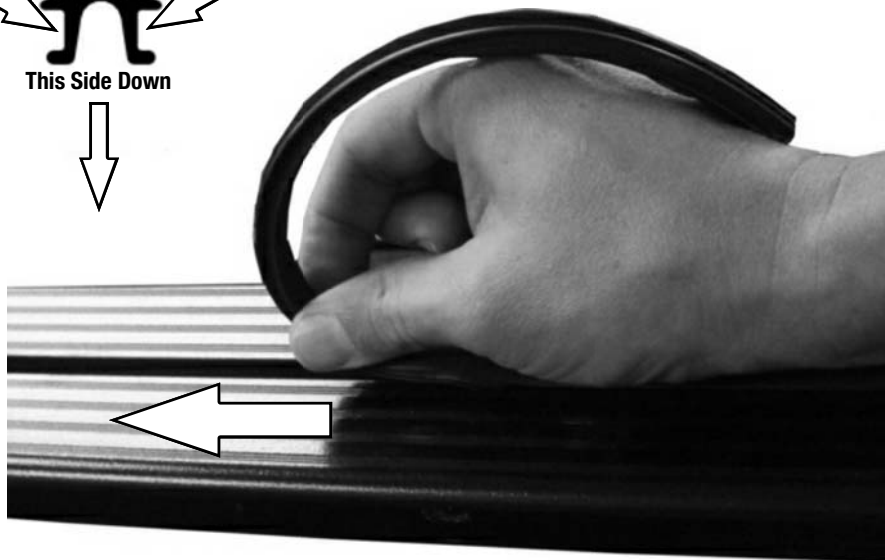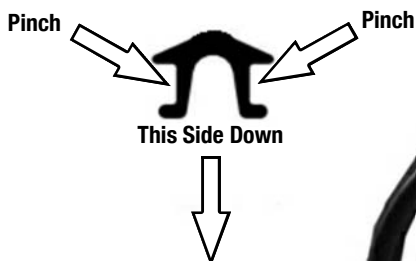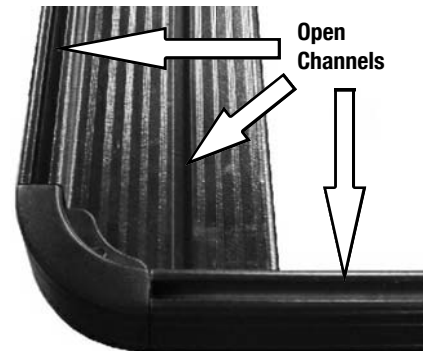


**Side View of T-slot Rubber in Channel**

**(B)** If this product came as part of your Rack Kit, refer to Instruction 2B on Page 2.

For further idea's on where to use the T-slot Rubber, please turn over the page.

### 3 USES FOR THE T-SLOT RUBBER

- (A) Prevent objects from moving on the Rack when securing or fastening and requires much less strapping tension, thereby preventing damage.

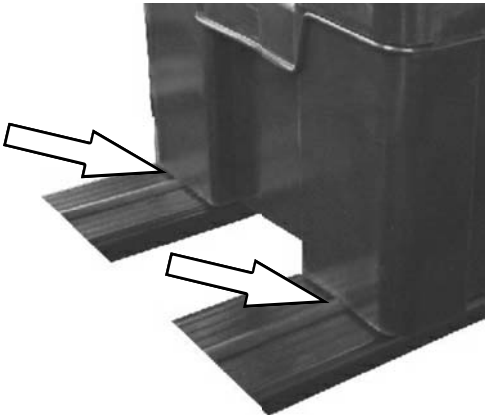

- (B) Reduce air whistling by inserting the T-slot Rubber into the Open Channels on the Front of the Rack.  
If your tent overhangs or is inline with the front of the Rack, it is recommended to insert T-slot Rubber into the Top Channel.



- (C) Secure and hide items like wiring in the Open Channels.

